

FD1608S-B2

8PON PORTS GPON OLT



Dedicated Chip



USB Interface




Back Battery Unit



Layer3 Switching

Brief Views

GPON OLT FD1608S-B2 completely meet relative standard of ITU G.984.x and FSAN, which is 1U rack-mounted device with 1 USB interface, 2 uplink Ethernet port, 2 uplink SFP ports, 4*10GE uplink ports and 8 GPON ports. Each GPON port supports the splitting ratio of 1:128, The GPON system supports up to 1024 terminal connections.

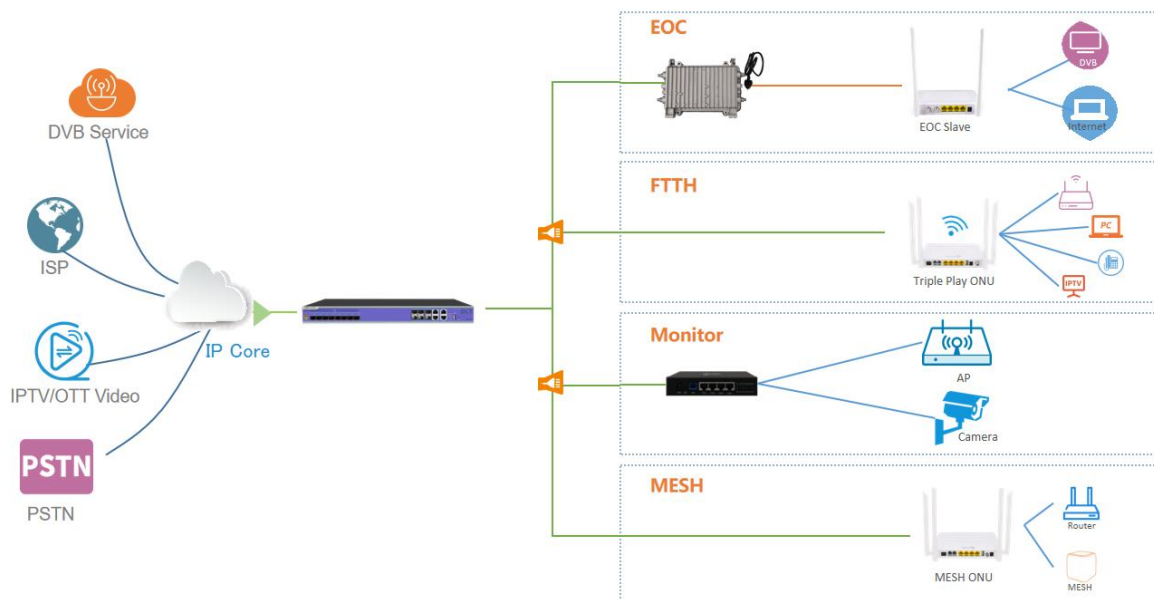

Functional Feature

GPON Function

- ITU-T G.984/G.988 standard
- Support OMCI protocol
- T-CONT DBA
- GEMPORT traffic
- ONU auto discover
- Ranging function
- Downstream data encrypted

Layer 2 Switching Function

- Access/Trunk/Hybrid L2 access mode
- Support 30K MAC address
- Support 4094 VLANs
- VLAN filter function,VLAN transform
- L2 port mirror
- Support 1024 static MAC address
- MAC address learning/aging
- MAC address limitation
- Static/Dynamic LACP
- ACL
- RSTP

Layer 3 Switching Function

- Static routing
- RIP
- DHCP server/DHCP relay/DHCP snooping
- ARP proxy

Multicast Function

- IGMP snooping
- IGMP V1/V2/V3
- Multicast VLAN translation

QOS Guarantee

- Traffic control function
- Congestion avoidance function
- Queue scheduling function
- ACL function

Reliability Function

- 1+1 power modules
- Fan speed automatically adjust


Management Function

- CLI/WEB/Telnet/SSH/MQTT
- Performance Management
- Alarm Management
- Security Management

Maintenance Function

- Device log
- Device upgrade
- Fault diagnose function
- Condition monitoring function

Product Interface

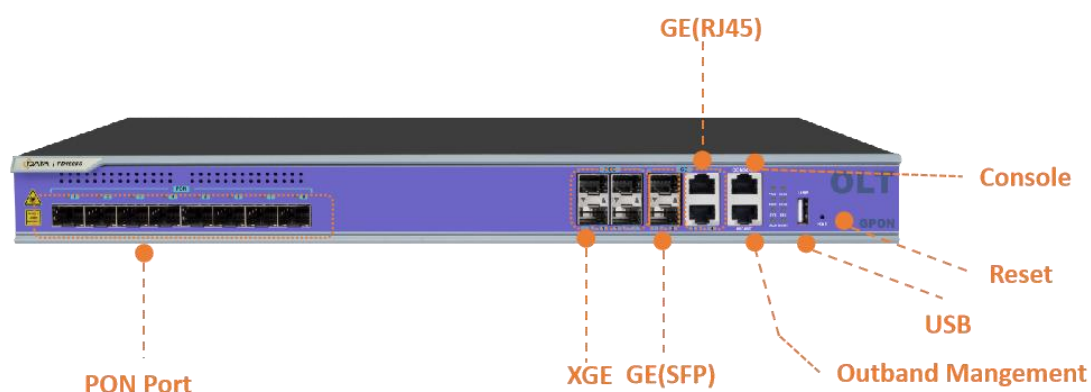

Product Specification

Mechanics

Management Rack	1U 19-inch standard box
Dimensions	440mm(L)*276mm(W)*44mm(H)
Weight	4.50Kg

Hardware

Uplink Port	2 10/100/1000M auto-negotiation Ethernet ports				
	2 SFP interfaces				
	10-Gigabit	4 SFP+ interfaces			
PON Port	Quantity	8			
	Physical interface	SFP slot			
	Interface type	GPON: ITU-TG.984.2 Class B+/Class C+/Class C++/Class C++++			
	Max splitting ratio	GPON: 1:128			
Management Port		1 100/1000BASE-Tx out-band Ethernet port 1 CONSOLE local management port			
USB Port		1 USB interface (It's used to backup configuration, upgrade program, and record log information)			
PON Port attribute	Transmission distance	20KM			
	Port rate	GPON: Downstream: 2.5Gbps Upstream: 1.25Gbps			
	Wavelength	Forwarding: 1490nm Receiving: 1310nm			
	Interface type	SC/UPC			
	Fiber type	9/125μm SMF (Single Mode Fiber)			
	Light transmission power	Class B+:+1.5 ~ +5dBm	Class C+:+3 ~ +7dBm	ClassC++++:+7.5dBm ~+10.5dBm	ClassC++: +4.5dBm~+10dBm
	Receiving sensitivity	Class B+: -28dBm	Class C+: -30dBm	ClassC++++: -30dBm	ClassC++: -31dBm
	Saturation power	Class B+: -8dBm	Class C+: -12dBm	ClassC++++: -10dBm	ClassC++: -10dBm
Backplane Bandwidth		118G			

Power supply

AC	100V ~ 240V, 47~63Hz
DC	-40V ~ -72V

Environment

Working temperature	-15 ~ 50℃
---------------------	-----------

Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.