

FD512XW-R470

1GE+1FE+WIFI XPON ONU



High Speed CPU



Low Power Consumption




Software Customization



Optional Shell Supply

Brief Views


FD512XW-R470 is an indoor fiber broadband access terminal. The device provides one GPON / EPON adaptive optical port and supports XPON mode. It can be used in connection with our company FD16 series GPON OLT or FD11 / 12 series EPON OLT. It can also interconnect with the mainstream manufacture (Huawei / ZTE / Fiberhome) GPON or EPON OLT to provide users with Internet, WIFI services based on GPON and EPON technology.

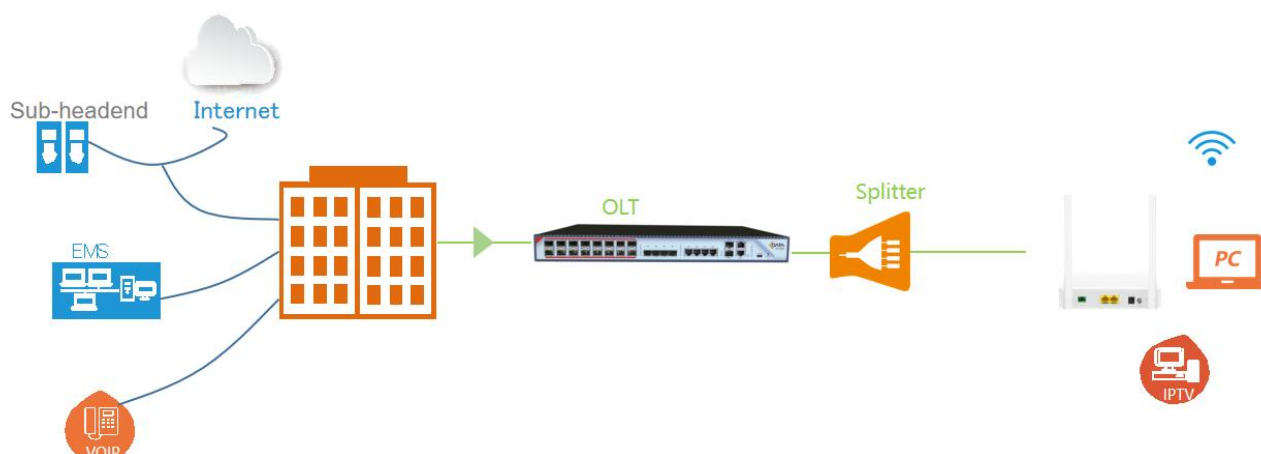

Functional Feature

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support remote WEB/Telnet access control

Product Interface and LED

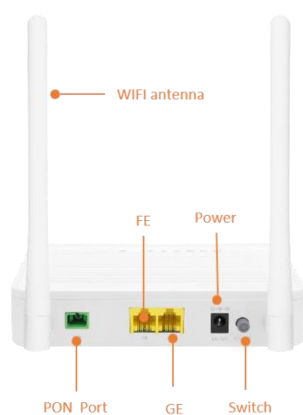

- ① PWR
- ② PON
- ③ LOS
- ④ INT
- ⑤ GE
- ⑥ FE
- ⑦ WIFI

LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
GE/FE	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.
WIFI	WIFI	Blinking :Data is being transmitted On:WIFI function Opens

Product Specification

Mechanics	
Dimensions	160mm(L)*112mm(W)*30mm(W)(Antennas are not included)
Weight	About 300g

Hardware			
User Port (LAN)		RJ-45 connector	
		1*10/100/1000Mbps and 1*10/100Mbps adaptive Ethernet port	
		Full/half duplex	
		Auto MDI/MDI-X	
Indicators		PWR / PON / LOS / GE / FE / INT /WIFI	
PON Port	Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+	
	Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream	
	Wavelength	Transmit: 1310nm	Receiver: 1490nm
	Receiving sensitivity	EPON: -27dBm	GPON: -28dBm
	Saturated power	EPON: -3dBm	GPON: -8dBm
	Transmitting power	EPON:0~4dBm	GPON: 0.5~5dBm

WIFI

IEEE802.11b/g/n

Max rate: 300M

MAX TX power :17dBm

Environment

Working temperature

0 to 40° C

Operating humidity

10% ~ 90% (Non-condensing)

Power

External 12VDC/0.5A power supply adapter

Power consumption

≤6.5W