

## FD504X-E-R310 1GE+3FE Data Type ONU



### Brief Views

FD504X-E-R310 EPON ONU is passive optical network terminal produced by C-Data for broadband access market based on EPON technology. It's are used together with EPON OLT to provide a complete broadband access solution.

EPON technology is an emerging technology which takes advantage of PON technology and Ethernet technology. It' s also point to multi-point network technology, and combined with single-fiber bidirectional technology. OLT device interconnected with multiple ONU through the passive optical network . EPON network system can use fewer fiber cable to meet the multi-user access needs of operators.


FD504X-E-R310 fully meets IEEE802.3ah and CTC3.0 standard protocol. It has good third-party compatibility to work with the third party OLT, It supports 1Gbps transmission rate up and down and provides users with good QOS, flexible bandwidth allocation of Ethernet services and IP integrated service.

### Functional Feature


- Support ONU auto-discovery/Link detection/remote upgrade of software;
- Support MAC and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support mac-address learning
- Support port-based rate limitation and bandwidth control;
- Support port isolate
- Support port flow-control

- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support remote management configuration
- Support Dynamic Bandwidth Allocation (DBA)
- Support Triple Churning algorithm encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection

## Product Interface and LED Definitions

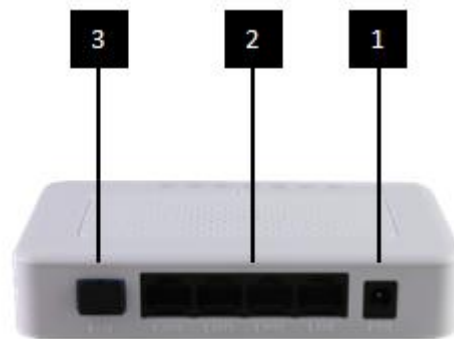

- 1** DC Power Port
- 2** LAN Port
- 3** Optical Port

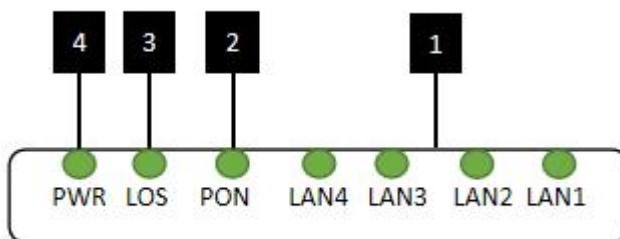

- 1** LAN Port Status
- 2** ONU Register Status
- 3** Optical Signal Status
- 4** Power Status

Indicator		Description
1	LAN1-4	LAN Port status On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
2	LOS	EPON optical signals On: Optical power lower than receiver sensitivity ; Off: Optical in normal
3	PON	ONU Register On: Success to register to OLT Blinking: In process of registering to OLT; Off: In process of registering to OLT;
4	PWR	Power status On: The ONU is power on; Off: The ONU is Power off;



**Specification**

Item	Parameter
PON Interface	1 EPON optical interface Meet 1000BASE-PX20+ standard Symmetric 1.25Gbps upstream/downstream SC/UPC single-mode fiber split ratio: 1:64 Transmission distance 20KM
User Ethernet Interface	1*10/100/1000M and 3*10/100M auto-negotiation Full/half duplex mode RJ45 connector Auto MDI/MDI-X 100m distance
Power Interface	An external 12V DC 0.5A power supply adapter
PON Optical Parameter	Wavelength: Tx 1310nm, Rx1490nm Tx Optical Power: 0~4dBm Rx Sensitivity: -27dBm Saturation Optical Power: -3dBm
Data Transmission Parameter	PON Throughput: Downstream 980Mbps; Upstream 950Mbps Ethernet: 100Mbps or 1000Mbps Packet Loss Ratio: <math><1 * 10E-12</math> latency: <math><1.5ms</math>
Business Capability	Layer 2 wire speed switching Support VLAN TAG/UNTAG, VLAN translation Support Port-based speed limitation Support Priority classification Support storm control of broadcast Support loop detection
Network Management	OAM, WEB, Telnet
Management Function	Status monitor, Configuration management, Alarm management, Log management
Power	<math><4W</math>, 12V/0.5A power supply adapter
Physical Specifications	Item Dimension: 130mm(L) x 90mm(W) x 30mm (H) Item Net Weight: about 93g
Environmental Specifications	Operating temperature: 0 to 40°C Operating humidity: 10% to 90%(Non-condensing)

## Network Application

Typical Solution: FTTH, FTTO

Typical Business: INTERNET, IPTV

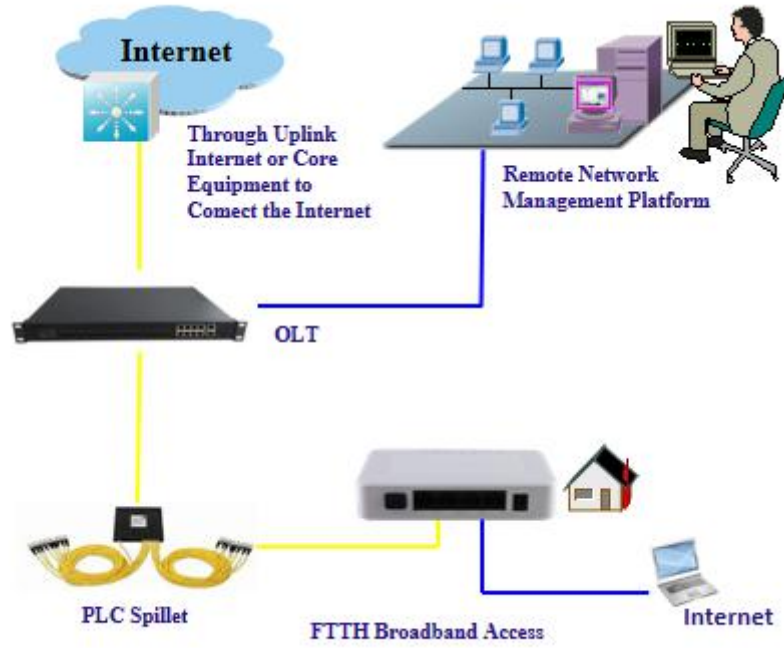

## Ordering Information

Product Name	Product Model	Descriptions
1GE+3FE	FD504X-E-R310	1*10/100/1000M and 3*10/100M Ethernet interface, 1 EPON interface, plastic casing, external power supply adapter