

FD212GW HGU Type EPON ONU



Overview

FD212GW is one of the EPON optical network unit design to meet the requirement of the broadband access network. It apply in FTTH/FTTO to provide the data, voice and video service based on the EPON network.



EPON is the latest generations of access network technology. IEEE802.3ah is the standard protocol of EPON. The EPON standard differs from other PON standards in that it achieves higher bandwidth and higher efficiency using larger, variable-length packets. EPON offers efficient packaging of user traffic, with frame segmentation allowing higher quality of service (QOS) for delay-sensitive voice and video communications traffic. EPON networks provides the reliability and performance expected for business services and provides an attractive way to deliver residential services. EPON enables Fiber To The Home (FTTH) deployments economically resulting to accelerated growth worldwide.

FD212GW provide one POTS ports, two GE auto-adapting Ethernet ports and one 802.11 n/b/g Wi-Fi port. The FD212GW features high-performance forwarding capabilities to ensure excellent experience with VoIP, Internet and HD video services. Therefore, the FD212GW provides a perfect terminal solution and future-oriented service supporting capabilities for FTTH deployment. It has good third-party compatibility to work with the third party OLT, such as Huawei/ZTE/Fiberhome/Alcatel-Lucen.

Features

- Full compatible with IEEE802.3ah
- Support one POTS
- Support two GE auto-adapting Ethernet ports
- Support one 802.11 n/b/g Wi-Fi port
- Support OAM and TR069 for remote management
- Support Web for local management
- Support Auto-negotiation and MDI/MDIX
- Support the Ethernet interface rate, working mode and flows control
- Support loopback at UNI
- Support packet filtering and anti-illegal message attack protection
- Support performance statistics of Ethernet lines
- Support VLAN tagged label processing, traffic classification and packet filtering, STP/RSTP etc.
- Support DHCP Option60 reporting the location information of the Ethernet interface
- Support PPPoE+ for accurate subscribers identification
- Support H.248、MGCP and SIP protocol
- Support IGMP Snooping
- Support AES-128

Product interface and LED definitions

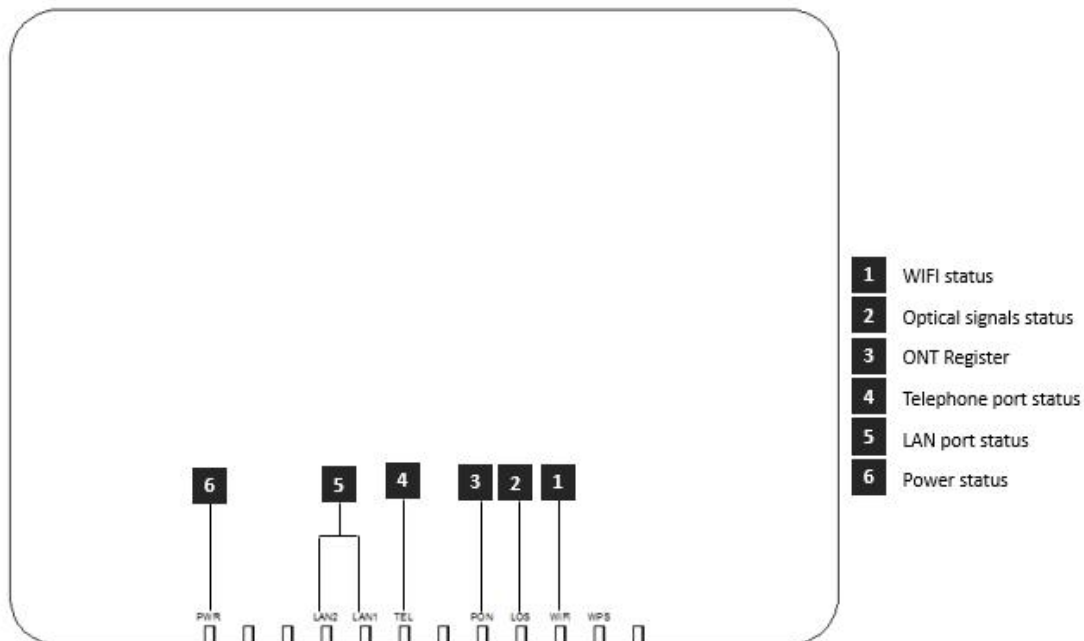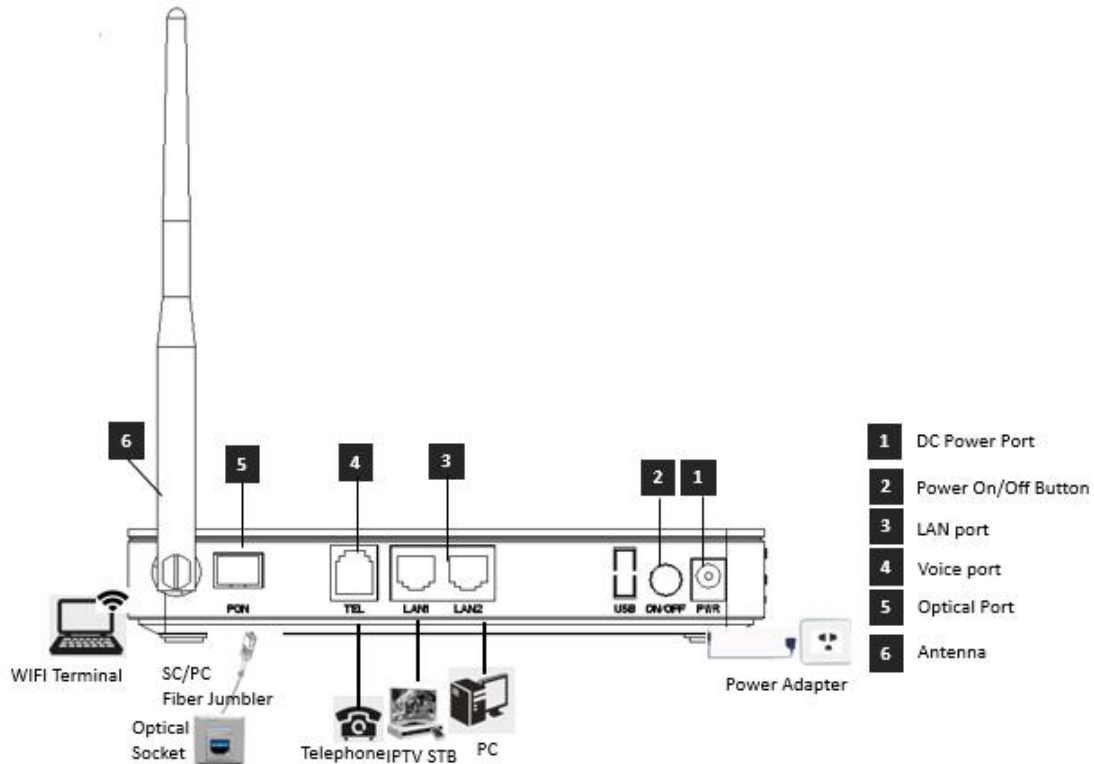

Indicator		Description
1	WIFI	WIFI Blinking : Data is being transmitted On : Wi-Fi function Opens
2	LOS	EPON optical signals On: Optical power lower than receiver sensitivity ; Off: Optical in normal
3	PON	ONU Register On: Success to register to OLT; Blinking: In process of registering to OLT; Off: In process of registering to OLT;

4	TEL	Telephone port status	On : The connection between the TEL port and the voice server has been set up Blinking : The voice service of the TEL port is established; Off : The connection between the TEL port and the voice server is not set up.
5	LAN1-2	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
6	PWR	Power status	On: The ONU is power on; Off: The ONU is Power off;



Specification

Item	Parameters	Specification
Interface	PON Port	1 EPON optical interface Meet 1000BASE-PX20+ standard Symmetric 1.25Gbps upstream/downstream SC single-mode fiber split ratio: 1:64 Transmission distance 20KM
	Ethernet Port(LAN)	2*10/100/1000M Auto-negotiation RJ45 ports Full Duplex / Half-Duplex RJ45, Auto-MDI/MDI-X Transmission Distance 100 Meter
	POTS Port	1*RJ11 with 3REN Max 1km distance Balanced Ring, 50V RMS
	Power Supply Port	12V DC input
Management	Network Management	Standard compliant OAM interface as defined by IEEE802.3ah Support TR-O69 and WEB management
	Management Function	Status monitor, Configuration management, Alarm management, Log management
Environmental Specifications	Shell	Plastic casing
	Power	External 12V 1A DC power supply adapter Power consumption: <7W
	Dimensions	170mm(L)*130mm(W)*30mm(H) 0.3kg
	Environment	Operating Temperature: 0~50℃ Storage Temperature: -40~85℃ Operating Humidity: 10%~90%(Non-condensing) Storage Humidity: 10%~90%(Non-condensing)

WIFI Features

- IEEE 802.11n compliant, 2.4 GHz
- Full IEEE 802.11b/g legacy compatibility with enhanced performance
- Two-stream spatial multiplexing up to 300 Mbps PHY data rates
- Support multi-SSID (Maximum 4 SSID)
- Support automatic channel selection
- Support hide SSID
- Support wireless security of 64/128 bit WEP、802.1x、WPA and WPA2。

WIFI Specification		
Performance parameters	Standard	IEEE802.11b/g/n
	Frequency	2.412 ~ 2.472GHz
	Antenna gain	5dBi
	Wireless data rate	IEEE 802.11b: 11Mbps IEEE 802.11g: 54Mbps IEEE 802.11n: 135Mbps
	Modulation schemes	DSSS, CCK, OFDM
	Code schemes	BPSK, QPSK, 16QAM and 64QAM
	Channel	13*Channel, configurable to meet the standard of USA, Canada, Japan and China
	RF receive sensitivity	802.11b: -96dBm @ 1 Mbps; -93dBm @ 2 Mbps; -91dBm @ 5.5 Mbps; -88dBm @ 11 Mbps 802.11g: -90dBm @ 6 Mbps; -89dBm @ 9 Mbps; -89dBm @ 12 Mbps; -867dBm @ 18 Mbps; -83dBm @ 24 Mbps; -79dBm @ 36 Mbps; -75dBm @ 48 Mbps; -75dBm @ 54 Mbps 802.11n: -96dBm @ 1 Mbps; -88dBm @ 11 Mbps; -90dBm@6Mbps; -75dBm@54Mbps; -86dBm@m0/20MHz; -69dBm@m15/20MHz;
	RF TxPower	•TX power out B mode @ 11 Mbps: 18dBm +/- 2 • TX power out G mode @ 54 Mbps: 16dBm +/- 2 • TX power 11n mode @ HT20: 16 dBm +/- 2
	Encryption Mode	64-bit, 128-bit WEP, AES, TKIP, WPA, WPA2, 802.1x

Application

- ◇ Solution: FTTH、FTTO
- ◇ Business: Broadband Internet、Voice、IPTV、VOD、IP Camera、WIFI

Network Construction

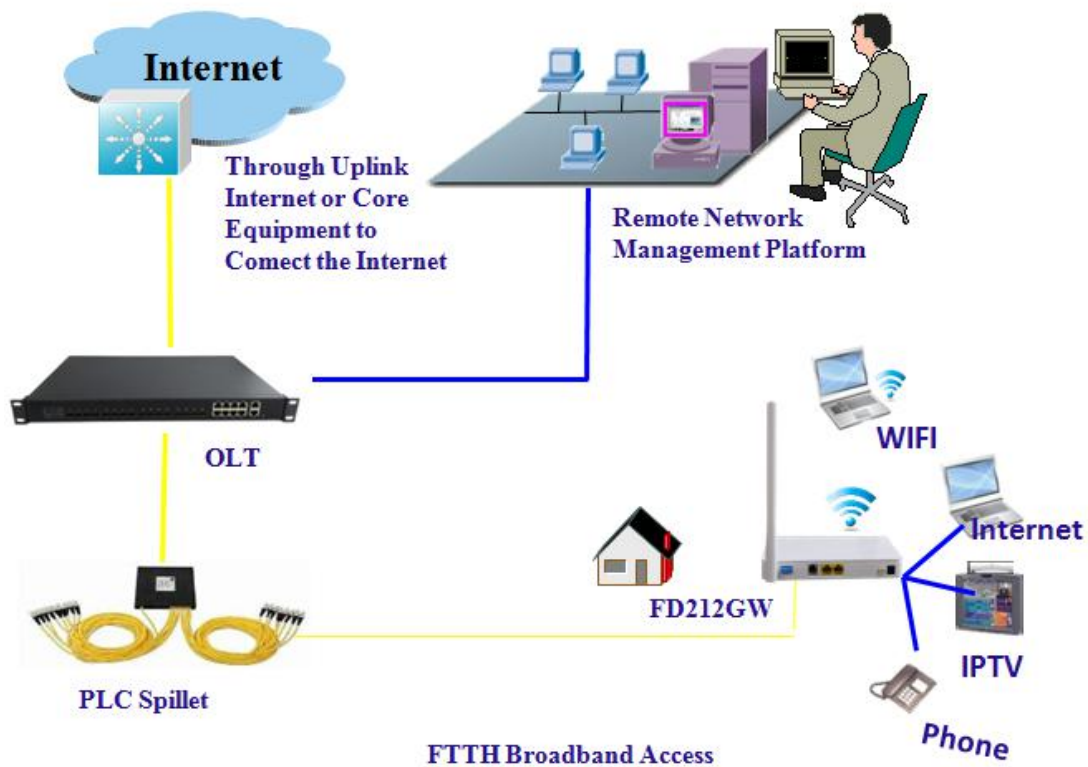


Figure: FD212GW Application Diagram

Ordering information

Product Name	Product Model	Descriptions
HGU Type with Wi-Fi EPON ONU	FD212GW	2*GE Ethernet interface, 1*POTS interface, 1*EPON interface, support Wi-Fi function, plastic casing, external power supply adapter